

DS-H100Q Turbo HD DVR



Features and Functions

Video Input and Transmission

- Connectable to HDTV, AHD, HDCVI and analog cameras
- Long distance transmission over UTP and coaxial cable with max. 1200m for the 720p and max. 800m for the 1080p HDTV signal

Compression and Recording

- One-key enable H.264+ compression to improve encoding efficiency by up to 50% and reduce data storage costs
- Up to 3 MP resolution for recording of the first channel of DS-H104Q, the first 2 channels of DS-H108Q, and the first 4 channels of DS-H116Q
- Supports real-time 1080p lite and when it's enabled, the image effect is similar with 1080p

Video Output

- Simultaneous HDMI/VGA output at up to 1920 × 1080 resolution for DS-H104Q/ DS-H108Q and 4K (3840 × 2160) resolution for HDMI output of DS-H116Q

Storage and Playback

- One SATA interface (up to 6 TB capacity per HDD)
- 4/8/16-ch synchronous playback
- Smart search for efficient playback

Smart Function

- VQD (Video Quality Diagnostics)
- Unlock pattern for device login for the *admin*
- Clear-text password available


Network & Ethernet Access

- Cloud P2P & HiDDNS (Dynamic Domain Name System) for easy network management
- One self-adaptive 10/100Mbps network interface for DS-H104Q/ DS-H108Q and one self-adaptive 10/100/1000Mbps network interface for DS-H116Q
- Output bandwidth limit configurable
- Mobile APP: CCTV Guard

Specifications

Model		DS-H104Q	DS-H108Q	DS-H116Q	
Video/Audio input	Video compression	H.264+/H.264			
	Analog video input	4-ch	8-ch	16-ch	
	HDTVI input	3 MP, 1080p/25Hz, 1080p/30Hz, 720p/25Hz, 720p/30Hz, 720p/50Hz, 720p/60Hz Note: The 3 MP signal input is only available for the first channel of DS-H104Q, the first 2 channels of DS-H1008Q, and the first 4 channels of DS-H116Q.			
	AHD input	1080p/25Hz, 1080p/30Hz, 720p/25Hz, 720p/30Hz			
	HDCVI input	1080p/25Hz, 1080p/30Hz, 720p/25Hz, 720p/30Hz			
	CVBS input	Support			
	Audio compression	G.711u			
	Audio input/Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 K Ω)			
Video/Audio output	HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz VGA: 1-ch, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	Encoding resolution	When 1080p Lite mode is not enabled: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF; When 1080p Lite mode is enabled: 1080p lite/720p lite/VGA/WD1/4CIF/CIF			
	Frame rate	Main stream: When 1080p Lite mode not enabled: For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@12fps For 1080p stream access: 1080p@12fps; 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/2CIF@12fps; CIF/QVGA/QCIF@25fps (P)/30fps (N)			
	Video bit rate	32 Kbps to 6 Mbps			
	Audio output	1-ch, RCA (Linear, 1 K Ω)			
	Audio bit rate	64 Kbps			
	Dual stream	Support			
	Stream type	Video, Video & Audio			
	Synchronous playback	4-ch	8-ch	16-ch	
	Network management	Remote connections	128		
		Network protocols	TCP/IP, PPPoE, DHCP, Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
Hard disk	SATA	1 SATA interface			
	Capacity	Up to 6 TB capacity for each disk			
External interface	Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface		1, RJ45 10M/100M/1000M self-adaptive Ethernet interface	
	USB interface	Real panel: 2 × USB 2.0			
General	Power supply	12 VDC			
	Consumption (without HDD)	≤ 8 W	≤ 12 W	≤ 20 W	
	Working temperature	-10 °C to +55 °C (14 °F to 131 °F)			
	Working humidity	10% to 90%			
	Dimensions (W × D × H)	200 × 200 × 45 mm (7.9 × 7.9 × 1.8 inch)		285 × 210 × 45 mm (11.2 × 8.3 × 1.8 inch)	
	Weight (without HDD)	≤ 0.8 kg (1.8 lb)		≤ 1.2 kg (2.6 lb)	

Physical Interfaces

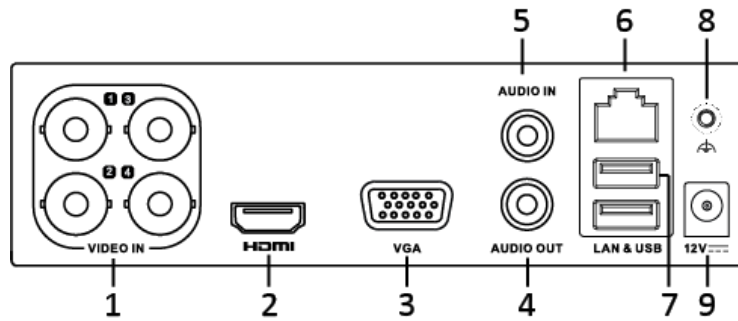

i NOTE

The rear panel of DS-H108Q / DS-H116Q provides 8/16 video input interfaces.

Index	Description	Index	Description
1	VIDEO IN	6	LAN Network Interface
2	HDMI Interface	7	USB Interfaces
3	VGA Interface	8	GND
4	AUDIO OUT, RCA Connector	9	12 VDC Power Input
5	AUDIO IN, RCA Connector		

Available Models

DS-H104Q, DS-H108Q, DS-H116Q